



EIR

What is EIR (Embossed in Register) Flooring ?

There are so many flooring options available today that it can be difficult to choose the perfect flooring for home or business. Technological advances have made it possible to have a floor with a beautiful look and feel of natural wood – but better - thanks to a perfect match between the design and the surface texture.



SKABEN

BREBO HANDELSKONTOR GMBH - ARTSTERDAMM 72A
28277 BREMEN - GERMANY
+49 421 40889740 / INFO@PARKETTKAISER.DE

SKABEN

WWW.PARKETTKAISER.DE

WWW.PARKETTKAISER.DE/SKABEN



RHINO55 (DVK)

RHINO CLICK 55 (RVC)



THE **EVERYDAY** FLOORING

RHINO 55 / RHINO CLICK 55 CONCEPT



RHINO 55 / RHINO CLICK 55 is a nature-inspired collection, highly textured, comprising many embossed-in-register decors, all available in a dryback finish (Rhino 55) and in a rigid click acoustic version (Rhino Click 55).

With its 0.55mm wear-layer, **RHINO 55 / RHINO CLICK 55** is designed to suit a variety of commercial applications.

The collection is made of 30 ultra-realistic decors, from subtle oaks to burnt woods, from classical concretes to industrial metal designs, corroded and oxidized by time.

For those looking for the aesthetics and timeless elegance of herringbones or chevrons floors, a selection of 5 wood colors is also offered in these 2 contemporary formats.

With its 70 references, RHINO 55 / RHINO CLICK 55 LVT CONCEPT always fits!

RHINO 55 RHINO CLICK 55 CONCEPT

Bring nature's beauty indoor and transform your workplace, shop, hotel or any room of the house into a place where you feel comfortable!



PRODUCTS BENEFITS

2 product structures suitable for residential and commercial uses. All wood decors embossed-in-register.

A selection of 5 wood colors available in herringbones and in chevrons patterns (Rhino 55).

Direct installation over most existing hard surface floors. Little or no subfloor preparation required (Rhino Click 55).

Resistant to scuff, scratches and stains. PUR Ecoprotec™ surface treatment for an easy cleaning.

Integrated acoustic pad for high sound reduction (22 dB – Rhino Click 55).

Suitable for underfloor heating. 100% waterproof.


Quick and easy to install thanks to the fold-down vertical click system (Rhino Click 55).

Very low VOC, phthalate free and 100% recyclable. Can be removed without leaving any residue (Rhino Click 55).



RHINO 55 / RHINO CLICK 55 CONCEPT

Bring nature's beauty indoor and transform your workplace, shop, hotel or any room of the house into a place where you feel comfortable!

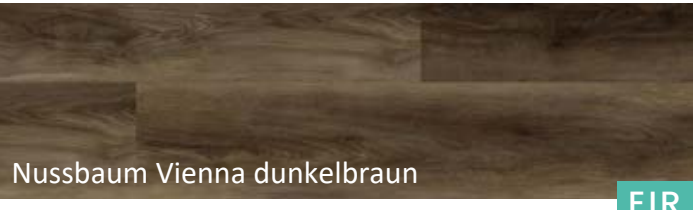

Nussbaum Vienna dunkelbraun
05K55DVK | 180 x 1210 mm
05C55RVC | 184,1 x 1219,2 mm



Townhouse Natur Eiche hell
25C55RVC | 180 x 1210 mm
25K55DVK | 184,1 x 1219,2 mm
CH 25C55DVK | 152,4 x 1066,8 mm (angle 45°)
HB 25H55DVK | 120 x 600 mm



Spreewald Eiche vergraut
45C55RVC | 180 x 1210 mm
45K55DVK | 184,1 x 1219,2 mm




Parisien Eiche greige
65C55RVC | 180 x 1210 mm
65K55DVK | 184,1 x 1219,2 mm



Milano Eiche natürlich
85C55RVC | 180 x 1210 mm
85K55DVK | 184,1 x 1219,2 mm



Nussbaum Vienna natürlich
15C55RVC | 180 x 1210 mm
15K55DVK | 184,1 x 1219,2 mm

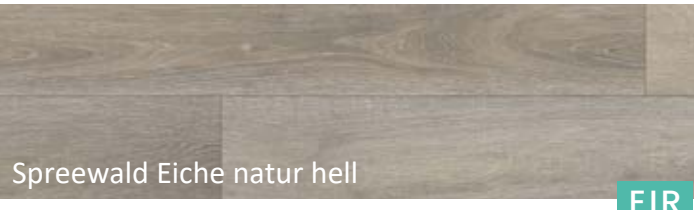


Spreewald Eiche natur hell
35C55RVC | 180 x 1210 mm
35K55DVK | 184,1 x 1219,2 mm



Parisien Eiche beige
55C55RVC | 180 x 1210 mm
55K55DVK | 184,1 x 1219,2 mm



Milano Eiche Weiß
75C55RVC | 180 x 1210 mm
75K55DVK | 184,1 x 1219,2 mm

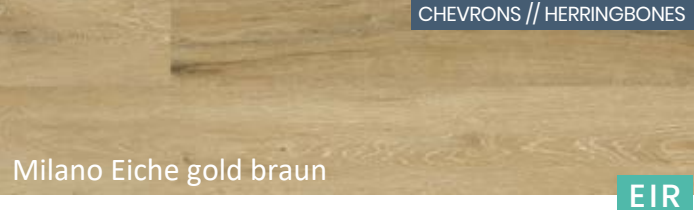


Milano Eiche gold braun
95C55RVC | 180 x 1210 mm
95K55DVK | 184,1 x 1219,2 mm
CH 95C55DVK | 152,4 x 1066,8 mm (angle 45°)
HB 95H55DVK | 120 x 600 mm




Albion Eiche greige
06C55RVC | 180 x 1210 mm
06K55DVK | 184,1 x 1219,2 mm




Albion Eiche natur
26C55RVC | 180 x 1210 mm
26K55DVK | 184,1 x 1219,2 mm

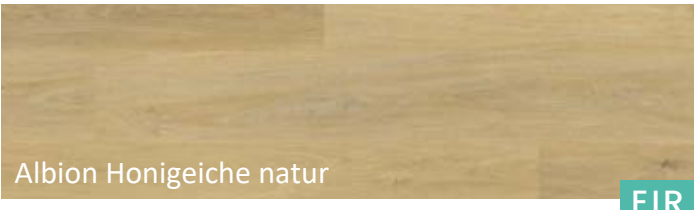


Albion Honigeiche natur
64C55RVC | 180 x 1210 mm
64K55DVK | 184,1 x 1219,2 mm

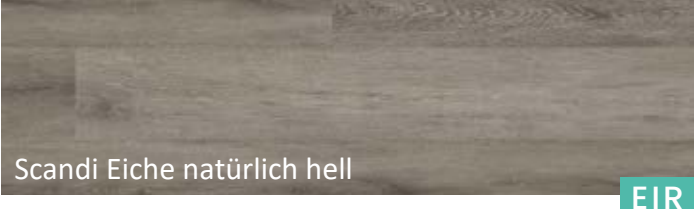


Scandi Eiche natürlich hell
66C55RVC | 180 x 1210 mm
66K55DVK | 184,1 x 1219,2 mm

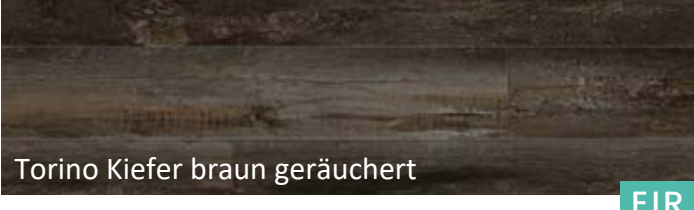


Torino Kiefer braun geräuchert
86C55RVC | 180 x 1210 mm
86K55DVK | 184,1 x 1219,2 mm

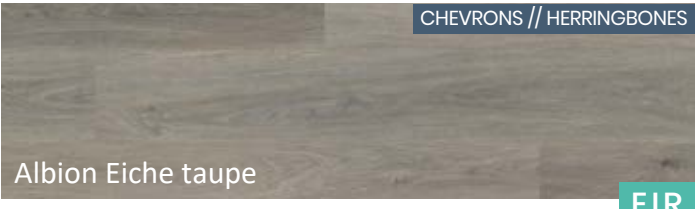


Albion Eiche taupe
16C55RVC | 180 x 1210 mm
16K55DVK | 184,1 x 1219,2 mm
CH 16C55DVK | 152,4 x 1066,8 mm (angle 45°)
HB 16H55DVK | 120 x 600 mm

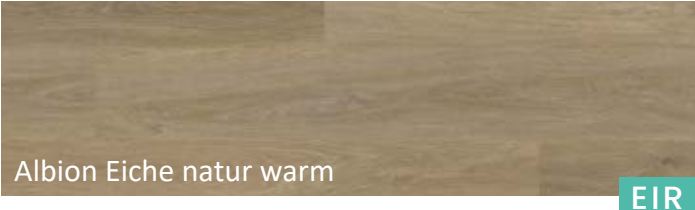


Albion Eiche natur warm
36C55RVC | 180 x 1210 mm
36K55DVK | 184,1 x 1219,2 mm

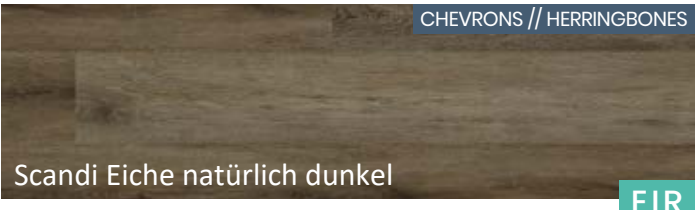


Scandi Eiche natürlich dunkel
56C55RVC | 180 x 1210 mm
56K55DVK | 184,1 x 1219,2 mm
CH 56C55DVK | 152,4 x 1066,8 mm (angle 45°)
HB 56H55DVK | 120 x 600 mm

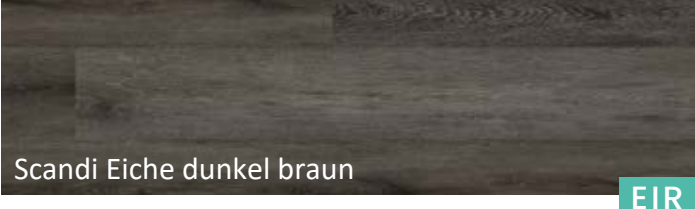


Scandi Eiche dunkel braun
76C55RVC | 180 x 1210 mm
76K55DVK | 184,1 x 1219,2 mm

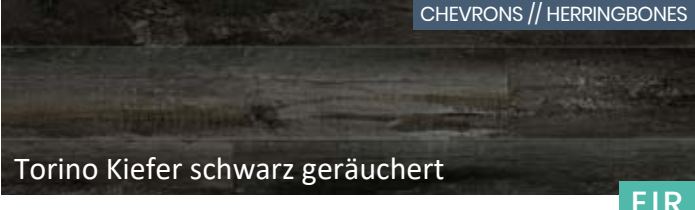

Torino Kiefer schwarz geräuchert
96C55RVC | 180 x 1210 mm
96K55DVK | 184,1 x 1219,2 mm
CH 96C55DVK | 152,4 x 1066,8 mm (angle 45°)
HB 96H55DVK | 120 x 600 mm

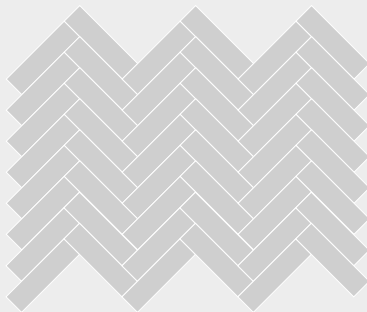

HERRINGBONES PATTERN

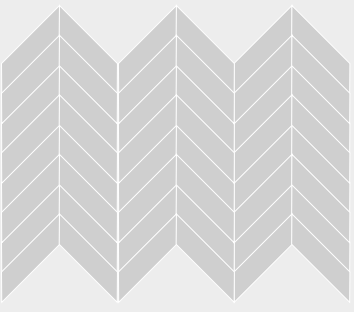

CHEVRONS PATTERN

HERRINGBONES & CHEVRONS
The aesthetics and timeless elegance of herringbones and chevrons floors is unique.

Herringbones & Chevrons patterns tell the story of castles, classical mansion houses and museums. They can also play a magnificent role in modern and classic homes.

REFERENCES :
RFO – RHINO CLICK 55
DFO – RHINO 55

CH Chevrons
HB Herringbones



Loft Zement grau
07C55RVC | 470 x 925 mm
07K55DVK | 457,2 x 914,4mm



Loft hell grau
27C55RVC | 470 x 925 mm
27K55DVK | 457,2 x 914,4mm



Loft Stahlbeton grau
47C55RVC | 470 x 925 mm
47K55DVK | 457,2 x 914,4mm



Loft Rusted Bronze Rot
67C55RVC | 470 x 925 mm
67K55DVK | 457,2 x 914,4mm




Loft Rusted hell grau
87C55RVC | 470 x 925 mm
87K55DVK | 457,2 x 914,4mm



Loft Zement dunkel grau
17C55RVC | 470 x 925 mm
17K55DVK | 457,2 x 914,4mm



Loft Beige
37C55RVC | 470 x 925 mm
37K55DVK | 457,2 x 914,4mm

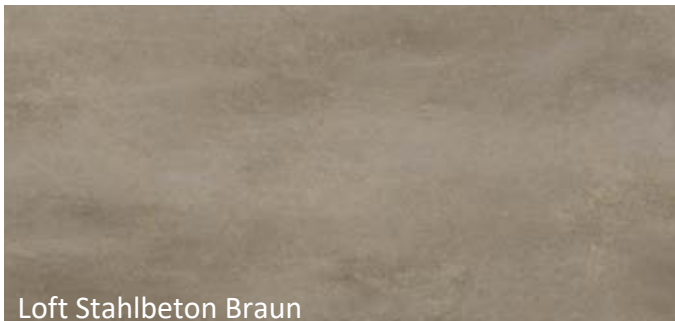

Loft Stahlbeton Braun
57C55RVC | 470 x 925 mm
57K55DVK | 457,2 x 914,4mm



Loft Rusted Schwarz Silber
77C55RVC | 470 x 925 mm
77K55DVK | 457,2 x 914,4mm



Loft Rusted braun
97C55RVC | 470 x 925 mm
97K55DVK | 457,2 x 914,4mm

PRODUCT SPECIFICATIONS	STANDARD	RHINO CLICK 55		RHINO 55	
Product standard	–	EN ISO 10582		EN ISO 10582	
Product standard	–	Heterogeneous resilient floorcovering		Heterogeneous resilient floorcovering	
Total thickness	EN ISO 24346	6,0 mm		2,5 mm	
Wear layer thickness	EN ISO 24340	0,55 mm		0,55 mm	
Classification	EN ISO 10874	Domestic: 23 / Commercial: 33 / Industrial: 42		Domestic: 23 / Commercial: 33 / Industrial: 42	
Total weight	EN ISO 23997	10.000 g/m²		4.750 g/m²	
Wear layer binder content	EN ISO 10582	Type I		Type I	
Abrasion group	EN 680-2	Group T: ≤ 2,00 mm³		Group T: ≤ 2,00 mm³	
Dimensions	EN ISO 24342	Planks: 180 x 1210 mm 10 planks/box = 2,18m² 40 boxes/pallet = 87,20m²		Planks: 184,1 x 1219,2 mm 20 planks/box = 4,49m² 40 boxes/pallet = 179,60m²	Planks (CH): 152,4 x 1066,8 mm 16 planks/box = 2,60m² 66 boxes/pallet = 171,60m²
		Tiles: 470 x 925 mm 5 tiles/box = 2,17m² 40 boxes/pallet = 86,80m²		–	Planks (HB): 120 x 600 mm 32 planks/box = 2,30m² 80 boxes/pallet = 184m²
Surface treatment	–	PUR Ecoprotec™		PUR Ecoprotec™	
Locking system	–	I4F		Dry back	
Bevelled edges	–	Yes		Yes (except Chevrons)	

PRODUCT PERFORMANCES	STANDARD	RHINO CLICK 55		RHINO 55	
Dimensional stability	EN ISO 23999	≤ 0,06 %		≤ 0,10 %	
Castor chair	ISO 4918	No damage (Type W)		No damage (Type W)	
Furniture leg	EN ISO 18581	No damage		No damage	
Squareness & straightness	EN ISO 24342	≤ 0,25 mm		≤ 0,25 mm	
Residual indentation	EN ISO 24343-1	≤ 0,10 mm		≤ 0,10 mm	
Impact sound reduction	EN ISO 717-2	ΔLw = 22 dB		ΔLw = 6 dB	
Light fastness	EN ISO 105-B02	≥ 6		≥ 6	
Slip resistance	DIN 51130 EN 13893	R10 DS		R10 DS	
Resistance to chemicals	EN ISO 28987	Not affected (a)		Not affected (a)	
Thermal resistance	EN ISO 10456	0,04 m² K/W		0,02 m² K/W	
Curl after exposure to heat	EN ISO 23999	≤ 2 mm		≤ 2 mm	
Fire resistance	EN 13501-1	Bfl-s1		Bfl-s1	
Electrical properties	EN 1815	≤ 2kV		≤ 2kV	
Resistance against staining	EN 26987	Passed		Passed	
Underfloor heating suitability	EN 12524	Suitable – max. 27°C		Suitable – max. 27°C	

ENVIRONMENT	STANDARD	RHINO CLICK 55		RHINO 55	
TVOC after 28 days (AgBB test) – Indoor air quality	ISO 16000-9	≤ 100µg/m³		≤ 100µg/m³	
VOC emission class (French regulation) – Indoor air quality	ISO 16000-9	A+		A+	
Floorscore VOC test – Indoor air quality	ISO 16000-9	Passed		Passed	
Plasticizer	–	Phthalate-free		Phthalate-free	
Formaldehyde group	EN 717-1	E1		E1	
Recyclability	–	100%		100%	

WARRANTIES	STANDARD	RHINO CLICK 55		RHINO 55	
Residential warranty	–	25 years		25 years	
Commercial warranty	–	10 years		10 years	

CE MARKING	STANDARD	RHINO CLICK 55		RHINO 55	
DoP number	–	No. 2F-KS-001		No. 2F-SW-001	

