


Verlegeanleitung



Megaloc 1.0 ohne integrierte Trittschalldämmung

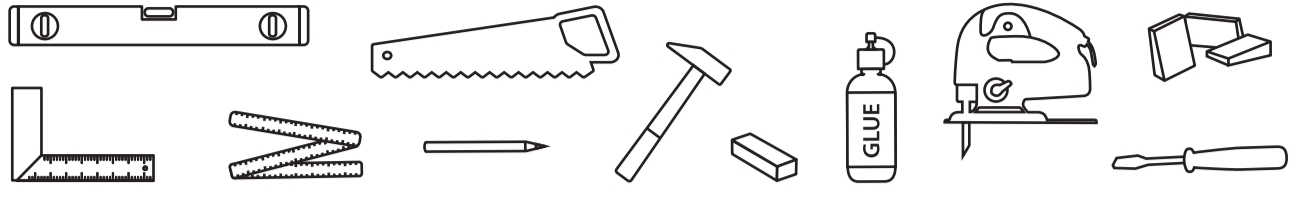

Rev. 6.1 / 11.20

1 rel. hum. 40-60%
temp. >18°C/64°F
48 h
≥ 30 cm
12 in

2 CA 0,3 CM % CT 1,8 CM %
max. 2 mm / 1 m
5/64 in / 3 ft

3 max. 3 mm, 1/8 in
0,2 mm PE

4 2 cm
25/32 in
20 cm
7 7/8 in

5 x=10 mm
3/8 in

6 max. 29°C
84°F

7 rel. hum. 40-60%
temp. >18°C/64°F

8 x=10 mm
3/8 in

9 > 8 cm
3 1/8 in

10 > 8 cm
3 1/8 in

11 x=10 mm
3/8 in

12 11 m
36 ft

13 11 m
36 ft

14 11 m
36 ft

15 x=10 mm
3/8 in

16 A, B

17 1, 2, 3

18 20°

19 > 30 cm
12 in

20 ø +20 mm
3/4 in

21 ø +20 mm
3/4 in

22 ø +20 mm
3/4 in

23 V1 > 8 cm
3 1/8 in

24 V1 > 8 cm
3 1/8 in

25 V1 > 8 cm
3 1/8 in

26 V2 10 mm
3/8 in

27 V2 +10 mm
3/8 in

28 V2 > 8 cm
3 1/8 in

29 28

30 29

31 30

32 31

33 1, 2, 3